

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

Floor Gullies



Organization	ACO Industries k.s.
Industry Program Operator	CENIA, Czech Environmental Information Agency, Executive Body of NPEZ Agency
Author	Technický a zkušební ústav stavební Praha, s.p.
Declaration No.:	7240005
Publication Date	2024-01-10
Valid until	2029-01-09 in accordance with EN 15804+A2:2019

1. General Information Declaration

Product:	Floor Gullies
Programme:	“National programme of environmental labelling“- CZ
Industry operator:	CENIA, Czech Environmental Information Agency, Executive body of the NPEZ Agency, Moskevská 1523/63, Praha 10, 101 00, www.cenia.cz
Name and address of the manufacturer:	ACO Industries k.s. Havlíčková 260 582 22 Přebyslav, CZ IČO: 48119458
EPD registration number:	7240005
Declared unit:	1 kg of average product
Product category rules:	N 15804+A2:2019 as core PCR
Publication Date:	2024-01-10
Valid until:	2029-01-09 in accordance with EN 15804+A2:2019

ACO Group is a world leader in drainage technologies and water management in general. Whether it's buildings, outdoor areas or even the marine industry, we develop and design solutions to maintain sustainable access to water. This is the essence of our work.

ACO Industries k.s. in Přebyslav is the largest production plant in the ACO Group and at the same time it is one of the largest production enterprises in the region Vysocina with a tradition since 1993. It mainly produces professional stainless steel drainage systems that serve, for example, in industrial buildings or drain outdoor paved surfaces. In addition to production itself, research & development is increasingly important to us. We work on unique projects from initial designs to their implementation.

Especially in recent years, the Pribyslav plant has advanced in innovation and development and has become the competence center of the ACO group. It houses the management of the strategic business area, which is the Internal Drainage of Buildings. Employees from product management, marketing and other departments are thus involved in the work of international teams, they develop and then introduce new product lines into production, they prepare broad sales and marketing support for them. It is no longer just about production as such.

New technologies and new requirements for the greatest possible sustainability of products and solutions are reflected in the further development of products and innovations. The essence of the developed solutions has always been, and continues to be, water. Especially recently, its protection has become more

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

and more urgent, so our experts are looking for modern and sustainable solutions that contribute to water protection.

More at: <https://www.aco-industries.cz/>

With regard to the possibility of comparing products as part of the **life cycle assessment of buildings** based on their EPD, which is carried out by determining their contribution to the environmental properties of the building, it is necessary that the EPD of the given building products be processed in accordance with the requirements of the standard EN 15804+A2:2019 *Sustainability of constructions - Environmental product declaration - Basic rules for the product category of construction products*.

1.1. Product data

Floor gullies

Floor gullies carry waste water from the floors to the drainage pipe. They are usually fitted with a foul air trap. Depending on a gully type, they can be combined with gully tops or channels. Both are usually covered with a grate. This assembly ensures a safe environment for people and prevents damage to building structures. The place of installation, for example a food processing plant or a large commercial kitchen, determines which version of the gully top or channel with a particular grate to choose. ACO offers gullies mainly in stainless steel and plastic. The most important factors in the design include:

- Type of operation
- Amount of wastewater
- Type of traffic and load class
- Slip resistance
- Type of waterproofing/sealing
- Fire protection requirements
- Hygienic properties such as cleanability and inspectability

1.1.1. Product technical data

The products are delivered according to the following standards:

- **EN 1253-1** Gullies for buildings - Part 1: Trapped floor gullies with a depth water seal of at least 50 mm
- **EN 1253-2** Gullies for buildings - Part 2: Roof drains and floor gullies without trap
- **EN 1253-4** Gullies for buildings - Part 4: Access covers
- **EN 1253-6** Gullies for buildings - Part 6: Trapped floor gullies with a depth of water seal less than 50 mm
- **EN 1253-7** Gullies for buildings - Part 7: Trapped floor gullies with mechanical closure
- **EN 124-1** Gully tops and manhole tops for vehicular and pedestrian areas - Part 1: Definitions, classification, general principles of design, performance requirements and test methods

Environmental Product Declaration – Floor Gullies

- **EN 124-3** Gully tops and manhole tops for vehicular and pedestrian areas - Part 3: Gully tops and manhole tops made of steel or aluminium alloys
- **EN 1433** Drainage channels for vehicular and pedestrian areas - Classification, design and testing requirements, marking and evaluation of conformity
- **EN 1672-2** Food processing machinery - Basic concepts - Part 2: Hygiene and cleanability requirements
- **EN ISO 14159** Safety of machinery – Hygiene requirements for design of machinery

More detailed product information can be found at: <https://www.aco-industries.cz/>

1.1.2. Rules for use

Use of products

- Commercial kitchens
- Food and beverage industry
- Pharmaceutical industry
- Chemistry industry
- Temperature-intensive environment and aggressive media
- Roof, balcony, and terrace drainage

Environment and health in use

Under normal conditions of use, the products do not create any adverse health effects or release volatile organic compounds into indoor air.

Due to the extremely low release of metal from the steel and the low maintenance requirements, no environmental impacts to water, air or soil are expected.

ACO sanitary drainage meets the strictest hygiene requirements to prevent contamination with harmful bacteria. The company applies the relevant hygienic design principles reserved for food processing equipment EN 1672-2, EN ISO 14159 and EHEDG.

Product certification:

Products are assessed in accordance with the standards that apply to them.

Reference lifetime

The reference lifetime for the product group is not declared. For these types of products, a typical estimated service life (RSL) is 50 years.

1.1.3. Method of delivery

The products shall be delivered in accordance with the standards referred to in point 1.1.1. on pallets.

Product quality is ensured by an effective quality management system according to EN ISO 9001 and EN 1090-1 in accordance with technical regulations regarding the type of product.

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

1.1.4. Basic raw materials and auxiliary substances

The main raw materials for the production of stainless steel gullies and grates are stainless austenitic steel sheets, coils, strips and bars. Recycled materials play a significant raw material role in stainless steel. Austenitic stainless steel is predominantly composed of iron and contains at least 10,5 % chromium and 8 to 12 % nickel. These elements in particular ensure corrosion resistance. In addition, stainless steel contains nitrogen as a strengthening element and, in small quantities, carbon.

The substances listed as substances of very high concern subject to authorisation by the European Chemicals Agency are not present in the stainless steel product in declared quantities

1.1.5. Production

Typical production technologies/processes are:

- Cutting of the delivered material by laser cutting or shearing or saw cutting
- Shaping of the completed material by bending on bending machines, in some cases by deep drawing on deep drawing presses
- Cutting holes or shaping bottom reinforcements (nibbling) on punching machines as required
- Finishing of contact surfaces for further processing on a lathe or milling machine
- Degreasing of products in a washing machine
- Depending on the type of product, spot welding, full welding (TIG, MIG, SAP), resistance welding or mechanical joining (clinching)
- Surface finishing according to the type of production - pickling and passivation, electrochemical polishing, blasting, grinding of appearance surfaces, shot blasting, hot-dip galvanizing, painting with water-based paint
- Final assembly and packaging of the product

1.1.6. Waste management

Wastes generated during the production process are collected according to type and reported according to regulations.

Possibility to recycle used products (at the end of their useful life)

Its ability to restore its original properties without loss of quality after melting makes steel the most recycled material in the world.

In the built environment, up to 100% of products can be reused or recycled at the end of their useful life.

1.2. LCA: Calculation rules

1.2.1. Declared unit

The declared unit shall be 1 kg of the average product – Floor Gullies

Environmental Product Declaration – Floor Gullies

All inputs and outputs of this report were considered as consumption or production related to the production of 1 kg of the named product. In the average product, the production of all partial types of products is considered.

Table 1: Declared unit and conversion factors

Identification	Unit	Value
Declared unit	kg	1
Conversion factor from kg	kg	1

2. System boundary according to the modular approach

The boundary of the product life cycle system consists of **the information module A1 – A3 "Production phase", "End of life cycle phase" C1-C4 and D** in accordance with EN 15804+A2:2019. The project report includes all relevant processes for the EPD type **"From cradle to gate with modules C1-C4 and module D"**.

Information on product system boundaries is shown in Table 2.

Table 2: Information about product system boundaries – information modules

Information about product system boundaries – information modules (X = Included, ND = module not declared)																
Production stage			Construction stage		Usage stage							End-of-life stage				Additional information beyond the life cycle
Supply of mineral resources	Transport	Production	Transport to the construction site	Construction/installation process	Usage	Maintenance	Repair	Replacement	Reconstruction	Operational energy consumption	Operating water consumption	Demolition/deconstruction	Transport	Waste treatment	Removal	Benefits and costs beyond the system. Potential for reuse, recovery, and recycling
A1	A2	A3	A4	A5	B1	B2	B3	B4	B5	B6	B7	C1	C2	C3	C4	D
X	X	X	ND	ND	ND	ND	ND	ND	ND	ND	ND	X	X	X	X	X

The system boundary is set to include both those processes that provide material and energy inputs to the system and subsequent production and transport processes up to the factory gate, and the treatment of all waste resulting from these processes.

The production stage includes the following modules:

- **A1** – extraction and processing of raw materials and production of packaging from input raw materials
- **A2** – transport of input raw materials from supplier to manufacturer, waste collection
- **A3** – production of products, production of auxiliary materials and semi-finished products, energy consumption, including treatment of waste, up to reaching end-of-waste or after the last material residues have been removed during the production phase.

Data for the period **2021** provided by ACO Industries k.s. is used.

The end-of-life stage includes modules:

- **C1**, deconstruction, demolition; of the product from the building, including its dismantling or demolition, including the initial classification of materials at the site of construction

Environmental Product Declaration – Floor Gullies

- **C2**, transport to the waste treatment site; transport of the discarded product as part of the waste treatment, e.g., to the recycling site, and transport of the waste, e.g., to the final disposal site.
- **C3**, treatment of waste for re-use, recovery and/or recycling, e.g., collection of waste fractions from deconstruction, treatment of waste from material flows intended for re-use, recycling, and energy recovery.
- **C4**, disposal of waste, including its pre-treatment and management of the disposal site

The benefits and costs beyond the product system are set out in Module D.

Module D includes:

- **D**, potential for reuse, recovery and/or recycling, expressed in net impacts or benefits.

The boundaries of the product system are considered in such a way that they **include only production processes, not administrative activities**.

As **end-of-life scenarios** for products (C1-C4, D), data resulting from an expert estimate of the possibility of reprocessing part of this glass insulation after the deconstruction of the building (as part of the take-back as a replacement for part of the inputs to production, reprocessing into another product – e.g., blown-in insulation, etc.) were used. These schemes are:

Module C1

Decomposition and/or dismantling of products are part of the demolition of the entire building. In this case, it is assumed that the impact on the environment is very small and can be neglected.

Module C2

The transport from the dismantled building takes place by a truck with a capacity of 7.5 - 16 t (EURO 5) to the recycling center, estimated transport distance: 20 km to the recycling centre.

Module C3

100% is considered for the use of products as recyclable material (as steel scrap for input into steel production).

Module C4

The landfilling process is not considered.

Potential for reuse, recovery and recycling (D)

In the module D scenario, the saving of primary raw material inputs – pig iron in another product system (steel production) is taken into account.

2.1. Preconditions and measures taken

Information modules **A4 to A5**, which are intended to provide additional information beyond the production stage, have not been included in the LCA due to the difficult availability of input data and are therefore not declared.

Information modules from the **usage stage B1 to B7** are also not declared because according to EN 16757 these types of products do not require maintenance, repair, or replacement during the normal life in the

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

Environmental Product Declaration – Floor Gullies

usage stage, provided that they are used correctly. Also, during the usage stage, they do not require consumption of energy or water.

The reference lifetime of the products is also not declared because of unavailability of representative data on the operating conditions in the usage stage of the product.

Within the studied product system, no co-products are formed.

For the study, all operational data related to the consumption of main and auxiliary materials of the product, energy data, diesel consumption and the distribution of annual waste and emissions according to the plant records were taken. For all inputs and outputs considered, transport costs were considered or differences in transport distances were recognised.

From the point of view of the waste produced, only the waste clearly related to production activities was included in the analysis.

Some input data were converted to units that were needed for selected generic process data in the environmental impact assessment calculation program.

These are:

- Energy data relating to **diesel** expressed in MJ – were determined by calculation based on data on diesel consumption in litres and a coefficient of 0,845 kg/l for diesel and an energy value of 42,6 MJ/kg.
- Data on **natural gas** consumption in Kwh – were determined by conversion from the consumed quantity to MJ (1 kWh = 3,6 MJ)

Data on waste production were taken from the ongoing waste register for the monitored period.

2.2. Cut-off criteria

The processes required for the installation of production equipment and the construction of infrastructure were not included in the analysis. Administrative processes are not included either – inputs and outputs are balanced on the production stage.

The analysis also did not include non-returnable packaging from input raw materials (for example lubricants), the amount of which is very small compared to other material inputs.

2.3. Sources of environmental data

All inputs and outputs were entered in SI units, namely:

- Material and auxiliary inputs and product outputs in kg, pcs, m³
- Sources used as energy input (primary energy), in MWh or MJ and GJ, including renewable energy sources (hydropower, wind energy)
- Water consumption in kg or m³
- Inputs related to transport in km (distance), tkm (material transfer) and in kg (diesel consumption)

Environmental Product Declaration – Floor Gullies

- Time was stated in practical units depending on the scale of the assessment: minutes, hours, days, years.

The time range of the required specific data provided by ACO Industries k.s., for the purpose of this report was set as a representative period **2021**. For this period, all available data were provided by the organization for their further processing.

Data on energy inputs were based on data valid for the Czech Republic - electricity production - national mix CZ, year 2021, Ecoinvent database 3.8. The division into individual energy sources was made according to OTE data.

For the following inputs it was proceeded this way (direct data not available):

- Distances on the transport of inputs and outputs (waste) – data from Google maps were used

For the complete analysis of environmental parameters were used:

- Computing software SimaPro, version 9.4 SimaPro Analyst (database Ecoinvent version 3.8).

2.4. Data quality

The data used to calculate the EPD meet the following principles:

Time period: For specific data, manufacturer's data from 2021 have been used. This is due to significant technological changes in the production process. For generic data, the data of the Ecoinvent version database 3.8 have been used. Based on the evaluation in accordance with EN 15804+A2, Annex E, tab. E.1 the generic data used meet the quality level - very good.

Technological aspect: Data corresponding to the current production of individual types of sub-products and corresponding to the current state of new technologies in the plant used have been used.

Based on the evaluation in accordance with EN 15804+A2, Annex E, tab. E.1 the generic data used meet the level of quality - very good.

Completeness and complexness aspect: Most of the input data is based on consumption balances, which are precisely recorded in the information system. As part of the completeness check, the company ACO industries k.s. was visited, and it was checked whether all used inputs/outputs are entered in the records. The reliability of the source of specific data is determined by the uniformity of the methodology of the information system collection method.

Geographical aspect: The generic data used from the Ecoinvent database are used with validity for the Czech Republic (e.g., energy inputs) and if data are not available for the Czech Republic, data valid for the EU or according to the supplier's location are used. Based on the evaluation according to EN 15804+A2, Annex E, tab. E.1 used generic data meet the level of quality - medium.

Consistency aspect: Uniform aspects are used throughout the scope of the report (allocation rules, age of data, technological scope of validity, time scope of validity, geographical scope of validity).

Credibility aspect: All important data were checked to ensure cross-comparison of weight balances.

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

2.5. Period considered

As the period of the required specific data, provided by ACO Industries k.s. for the purpose of this report, a calendar period **2021** was determined as a representative period.

2.6. Allocation

In the balance of inputs, their direct monitoring was used at individual centres, or allocation based on weight was used.

2.7. Comparability

Environmental product declarations from different programmes may not be comparable. Comparison or assessment of EPD data is only possible if all compared data reported in accordance with EN 15804+A2:2019 have been determined according to the same rules.

2.8. Product variability

The resulting data are given for **1 kg of average product**.

2.9. LCA: Results

Information on environmental impacts is expressed in the following tables:

- Parameters describing basic environmental impacts
- Parameters describing additional environmental impacts
- Parameters describing resource consumption
- Additional environmental information – description of the waste category
- Additional environmental information – description of output flows
- Information describing the content of biogenic carbon in the factory gate

The data are always related to the declared unit (DJ) - 1 kg of average product.

The impact assessment was carried out using the characterisation factors used in the European Life Cycle Reference Database (ELCD) provided by the European Commission – Directorate-General of the Joint Research Centre – Institute for Environment and Sustainability.

Parameters describing **the basic environmental impacts**

Ultimately LCA – Parameters describing basic environmental impacts (DJ = 1 kg of the product)							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Global warming potential (GWP-total)	kg CO ₂ ekv.	5,86E+00	0,00E+00	2,04E-02	2,46E-02	1,24E-05	-4,37E-01
Global warming potential (GWP-fossil)	kg CO ₂ ekv.	5,88E+00	0,00E+00	2,04E-02	2,50E-02	1,24E-05	-4,37E-01

Environmental Product Declaration – Floor Gullies

Ultimately LCA – Parameters describing basic environmental impacts (DJ = 1 kg of the product)							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Global warming potential (GWP-biogenic))	kg CO ₂ ekv.	-2,75E-02	0,00E+00	2,07E-05	-4,40E-04	9,80E-11	-4,81E-05
Global warming potential from land use and land-use change (GWP-luluc)	kg CO ₂ ekv.	5,08E-03	0,00E+00	1,22E-05	4,76E-05	2,77E-11	-2,32E-04
Stratospheric ozone depletion potential (ODP)	kg CFC 11 ekv.	3,46E-07	0,00E+00	4,45E-09	3,32E-09	5,91E-14	-2,08E-08
Acidification potential, Cumulative exceedance (AP)	mol H+ ekv.	3,34E-02	0,00E+00	7,94E-05	2,97E-04	2,91E-09	-2,81E-03
Eutrophication potential, proportion of nutrients entering fresh water (freshwater EP)	kg P ekv.	2,28E-03	0,00E+00	1,89E-06	1,58E-05	8,61E-12	-7,40E-05
Eutrophication potential, proportion of nutrients entering seawater (seawater EP)	kg N ekv.	6,21E-03	0,00E+00	2,18E-05	6,74E-05	2,39E-08	-6,70E-04
Eutrophication potential, Cumulative overshoot (soil EP)	mol N ekv.	6,31E-02	0,00E+00	2,38E-04	7,55E-04	1,40E-08	-7,54E-03
Ground-level ozone formation potential (POCP)	kg NMVOC ekv.	2,04E-02	0,00E+00	7,42E-05	2,08E-04	6,98E-09	-3,17E-03
Raw material depletion potential for non-fossil sources (ADP-minerals and metals))	kg Sb ekv.	1,56E-04	0,00E+00	1,27E-07	2,96E-06	1,43E-13	-3,27E-07
Raw material depletion potential for fossil resources (ADP-fossil fuels)	MJ, calorific value	7,33E+01	0,00E+00	3,03E-01	3,45E-01	3,79E-06	-2,72E+00
Water scarcity potential (for users), water scarcity weighted by water scarcity (WDP)	m3 eq. scarcity	2,63E-03	0,00E+00	1,18E-03	4,55E-03	5,96E-09	-1,99E-02

Parameters describing additional environmental impacts

LCA result – Parameters indicating additional environmental impacts (DJ = 1 kg of the product)							
Indicator	Unit	A1-A3	C1	C2	C3	C4	D
Potential occurrence of disease due to particulate matter emissions (PM)	Occurrence of the disease	4,42E-07	0,00E+00	1,29E-09	3,99E-09	7,70E-14	-4,84E-08
Potential effect of human exposure to the isotope U235 (IRP)	kBq U235 eq.	5,98E-01	0,00E+00	1,69E-03	3,54E-03	1,71E-08	-1,61E-02
Potential comparative toxic unit for ecosystems (ETP-fw)	CTUe	1,72E+02	0,00E+00	2,66E-01	1,27E+00	5,44E-06	-1,46E+01
Potential comparative toxic unit for humans (HTP-c)	CTUh	1,39E-07	0,00E+00	2,63E-10	1,87E-09	4,29E-15	-2,27E-08
Potential comparative toxic unit for humans (HTP-nc)	CTUh	1,25E-07	0,00E+00	1,12E-11	4,27E-11	9,80E-17	-1,15E-09
Potential Soil Quality Index (SQP)	dimensionless	3,30E+01	0,00E+00	1,48E-01	6,37E-01	1,57E-05	-7,35E-01

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

12 / 17

Environmental Product Declaration – Floor Gullies

Parameters describing resource consumption

LCA result – Parameters describing resource consumption (DJ = 1 kg of the product)							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Consumption of renewable primary energy, excluding energy sources used as raw materials (PERE)	MJ	1,51E+01	0,00E+00	6,44E-03	5,36E-02	2,14E-08	-1,24E-01
Consumption of renewable primary energy sources used as raw materials (PERM)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total consumption of renewable primary energy sources (primary energy and primary energy sources used as raw materials) (PERT)	MJ	1,51E+01	0,00E+00	6,44E-03	5,36E-02	2,14E-08	-1,24E-01
Consumption of non-renewable primary energy, excluding energy sources used as raw materials (PENRE)	MJ	7,82E+01	0,00E+00	3,22E-01	3,66E-01	4,03E-06	-2,88E+00
Consumption of non-renewable primary energy sources used as raw materials (PENRM)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Total consumption of non-renewable primary energy sources (primary energy and primary energy sources used as raw materials) (PENRT)	MJ	7,82E+01	0,00E+00	3,22E-01	3,66E-01	4,03E-06	-2,88E+00
Consumption of secondary raw materials (SM)	kg	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Consumption of renewable secondary fuels (RSF)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Consumption of non-renewable secondary fuels (NRSF)	MJ	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00
Net potable water consumption (FW)	m3	2,63E-03	0,00E+00	0,00E+00	0,00E+00	0,00E+00	0,00E+00

Other environmental information - waste category description

LCA result – Other environmental information – waste category description (DJ = 1 kg of the product)							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Hazardous waste disposed of (HWD)	kg	1,14E-01	0	0	0	0	0
Other waste disposed of (NHWD)	kg	0	0	0	0	0	0
Radioactive waste disposed of (RWD)	kg	0	0	0	0	0	0

Other environmental information - description of production flows

LCA result - Other environmental information - description of output flows (DJ = 1 kg of the product)							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Construction units for reuse (MFR)	kg	0	0	0	0	0	0
Materials for recycling (MER)	kg	2,70E-01	0	0	1,00E+00	0	1,00E+00
Materials for energy recovery (EEE)	kg	0	0	0	0	0	0

Environmental Product Declaration – Floor Gullies

LCA result - Other environmental information - description of output flows (DJ = 1 kg of the product)							
Parameter	Unit	A1-A3	C1	C2	C3	C4	D
Exported energy (EET)	MJ per energy carrier	0	0	0	0	0	0


Information describing the **biogenic carbon content** of the plant gate

LCA result – Information describing the biogenic carbon content at the plant gate (DJ = 1 kg of the product)		
Parameter	Unit	At the plant gate
Biogenic carbon content of the product	kg C	0
Biogenic carbon content in the appropriate packaging	kg C	5,59E+02

2.9.1. LCA: Interpretation

The influence of the share of information modules A-D on the basic environmental impacts is shown in the following figure 2:

Fig. 2 The influence of the share of information modules A-D on the basic indicators in module A1-A3

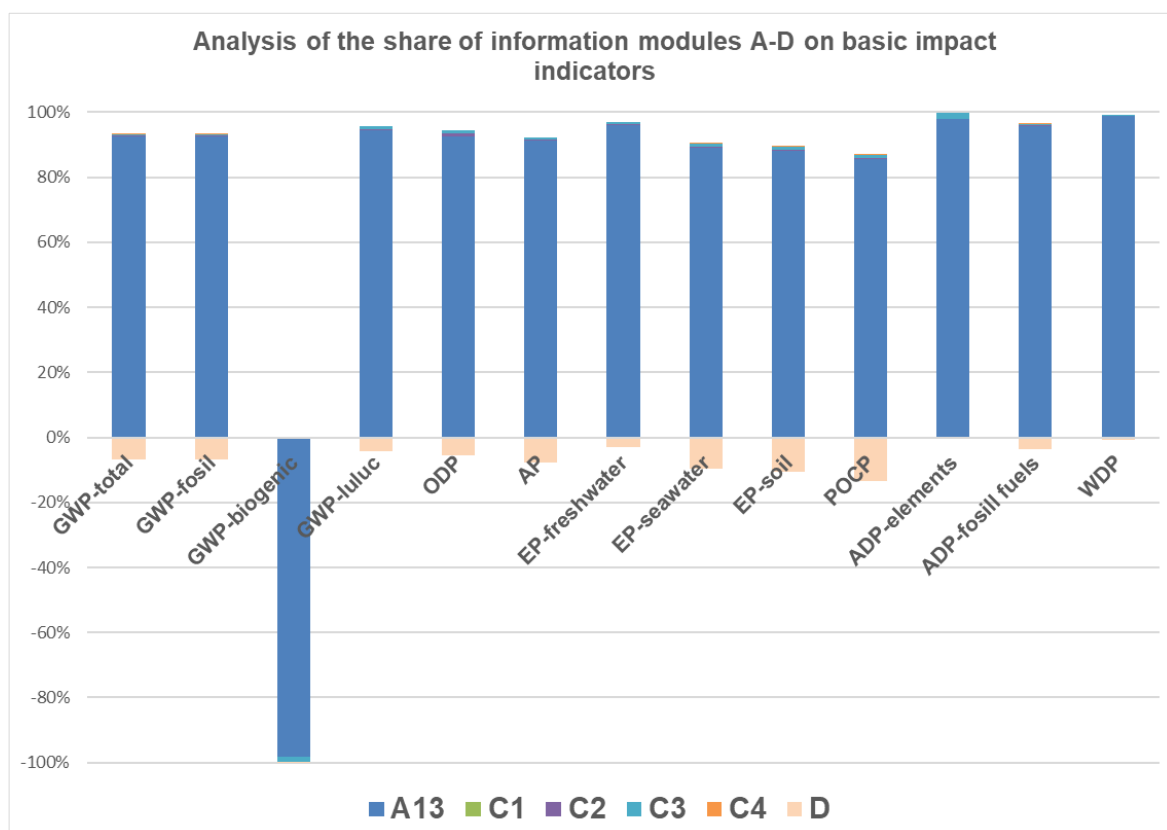

The consumption of **steel** and partially also the **consumption of electricity** (energy mix of the Czech Republic) have a very significant influence on environmental impacts. To a lesser extent, the effect of **transport** is also applied.

Floor Gullies

Environmental Product Declaration

In accordance with ČSN ISO 14025:2010 and EN 15804:2021+A2:2019+AC:2021

3. LCA: scenarios and other technical information

Information modules A4, A5 and B1-B7 were not included in the LCA analysis.

4. LCA: Additional information

EPD does not include additional documentation related to the declaration of supplementary information.

5. References

ČSN ISO 14025:2010 Environmentální značky a prohlášení - Environmentální prohlášení typu III - Zásady a postupy (Environmental labels and declarations - Type III environmental declarations - Principles and procedures)

ČSN EN 15804+A2:2020 Udržitelnost staveb - Environmentální prohlášení o produktu - Zásadní pravidla pro produktovou kategorii stavebních výrobků (Sustainability of construction works - Environmental product declarations - Core rules for the product category of construction products)

ČSN EN ISO 14040:2006 Environmentální management - Posuzování životního cyklu - Zásady a osnova (Environmental management - Life Cycle Assessment - Principles and Framework)

ČSN EN ISO 14044:2006 Environmentální management - Posuzování životního cyklu – Požadavky a směrnice (Environmental management - Life Cycle Assessment – Requirements and guidelines)

ČSN ISO 14063:2007 Environmentální management - Environmentální komunikace - Směrnice a příklady (Environmental management - Environmental communication - Guidelines and examples)

ČSN EN 15643-1:2011 Udržitelnost staveb - Posuzování udržitelnosti budov - Část 1: Obecný rámec (Sustainability of construction works - Sustainability assessment of buildings - Part 1: General framework)

ČSN EN 15643-2:2011 Udržitelnost staveb - Posuzování udržitelnosti budov - Část 2: Rámec pro posuzování environmentálních vlastností (Sustainability of construction works - Assessment of buildings - Part 2: Framework for the assessment of environmental performance)

ČSN EN 15942:2013 Udržitelnost staveb - Environmentální prohlášení o produktu - Formát komunikace mezi podniky (Sustainability of construction works - Environmental product declarations - Communication format business-to-business)

TNI CEN/TR 15941:2012 Udržitelnost staveb - Environmentální prohlášení o produktu - Metodologie výběru a použití generických dat (Sustainability of construction works - Environmental product declarations - Methodology for selection and use of generic data)

ČSN EN 16449:2014 Dřevo a výrobky na bázi dřeva - Výpočet obsahu biogenního uhlíku ve dřevě a přeměny na oxid uhličitý (Wood and wood-based products - Calculation of the biogenic carbon content of wood and conversion to carbon dioxide) ILCD handbook - JRC EU, 2011

Zákon č. 541/2020 Sb. v platném znění (Zákon o odpadech) / Act. No. 541/2020 Coll., as amended (Waste Act)

Environmental Product Declaration – Floor Gullies

Vyhláška č. 8/2021 Sb. Katalog odpadů – Katalog odpadů / Decree No. 8/2021 Coll. Waste catalogue – Waste catalogue

Nařízení Evropského parlamentu č. 1907/2006 o registraci, hodnocení, povolování a omezování chemických látek a o zřízení Evropské agentury pro chemické látky - REACH (registrace, evaluace a autorizace chemických látek) / Regulation (EC) No 1907/2006 of the European Parliament concerning the Registration, Evaluation, Authorisation and Restriction of Chemicals (REACH) and establishing a European Chemicals Agency - REACH (Registration, Evaluation and Authorisation of Chemicals)


Nařízení Evropského parlamentu a Rady (ES) č. 1272/2008 o klasifikaci, označování a balení látek a směsí, o změně a zrušení směrnic 67/548/EHS a 1999/45/ES a o změně nařízení (ES) č. 1907/2006 (nařízení CLP) / Regulation (EC) No 1272/2008 of the European Parliament and of the Council on classification, labelling and packaging of substances and mixtures, amending and repealing Directives 67/548/EEC and 1999/45/EC and amending Regulation (EC) No 1907/2006 (CLP Regulation)

SimaPro LCA Package, Pré Consultants, the Netherlands, www.pre-sustainability.com



Ecoinvent Centre, www.Ecoinvent.org

Explanatory documents are available at the sales department of ACO Industries k.s.

6. EPD verification

Independent verification of declaration in accordance with ČSN ISO 14025:2010			
The ČSN EN 15804+A2 standard produced by CEN serves as the basic PCR ^a			
<input type="checkbox"/>	internal	<input checked="" type="checkbox"/>	external
Third party verifier ^b:			
Elektrotechnický zkušební ústav, s. p. Pod lisem 129/2, Troja, 182 00 Praha 8 Czech Republic 		 Mgr. Miroslav Sedláček Head of certification body	
Certification body for EPD, accredited by CIA, Czech Accreditation Institute under no. 3018			
^a Product category rules ^b Optional for business communication, mandatory for business-to-consumer communication (see ISO 14025:2010, clause 9.4).			

This document is a translation of the EPD issued in Czech. In case of doubt use the Czech version of this EPD as a reference.

	Organization: ACO Industries k.s. Havlíčkova 260 582 22 Přebyslav, CZ	Tel: +420 569 491 111 +420 724 025 510 Email: fkoffer@aco.cz , Web: https://www.aco-industries.cz
	Branch operator of the program: CENIA, Environmental Information Agency, executive body of the NPEZ Agency Moskevská 1523/63 100 10 Praha 10	Tel: +420 267 225 226 Email: info@cenia.cz Web: www.cenia.cz
	Elaborated by: TZÚS Praha brand Plzeň Zahradní 15 326 00 Plzeň, CZ	Tel. : +420 734 432 137 +420 602 185 785 vrbova@tzus.cz trinner@tzus.cz



ELECTROTECHNICAL TESTING INSTITUTE - CZECH REPUBLIC
ELEKTROTECHNISCHE PRÜFANSTALT - TSCHECHISCHE REPUBLIK
INSTITUT ELECTROTECHNIQUE D'ESSAIS - RÉPUBLIQUE TCHÉQUE
ЭЛЕКТРОТЕХНИЧЕСКИЙ ИСПЫТАТЕЛЬНЫЙ ИНСТИТУТ - ЧЕШСКАЯ РЕСПУБЛИКА

Pod lisem 129/2, Troja, 182 00 Praha 8

Electrotechnical Testing Institute, the certification body No. 3018, accredited by the Czech Accreditation Institute according to ČSN EN ISO/IEC 17065:2013, grants the

ATTESTATION OF VALIDITY OF ENVIRONMENTAL PRODUCT DECLARATION TYPE III (EPD)

No.: 7240005

in accordance with ČSN ISO 14025 Environmental labels and declarations –
environmental declarations type III – Principles and procedures

PCR ČSN EN 15804+A2 Sustainability of construction works – Environmental
product declarations – Core rules for the product category of construction products

for product

Floor Gullies

manufactured by

ACO Industries k.s.



Havlíčková 260, 582 22 Přebyslav, Czech Republic

because it has verified credibility of information, described in the Environmental Product Declaration type III (EPD) dated on:
10.01.2024 and documented in the report No.: 232711-01 of: 09.01.2024

The validity of the Attestation is limited till: 09.01.2029

Certificate granted: 10.01.2024

Prague

Mgr. Miroslav Sedláček
Head of Certification Body



232711-01